


Fenced Parts Department  
**JOHNSON CITY FLEET MANAGEMENT**

City of Johnson City ITB 6215

**SHAW & SHANKS ARCHITECTS, PC**  
205 East Unaka Avenue  
Johnson City, TN 37601

**ADDENDUM NUMBER TWO**  
April 6, 2018

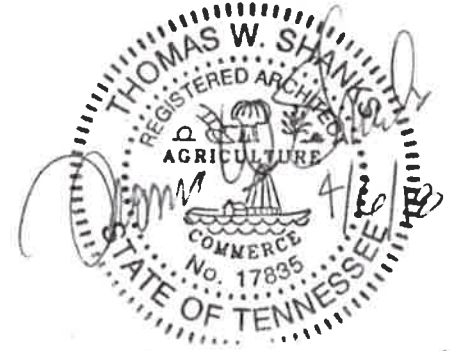

The original Project Manual and Drawings, dated March 9, 2018, for the above project are amended as noted in this Addendum. Receipt of this Addendum shall be acknowledged on the Bid Form on which the Contractor submits his bid.

This Addendum consists of one (1) page and the attachments noted herein.

GENERAL:

ADD 2-1 Note that construction documents have been submitted to the Johnson City Building Department for permitting review. Project has been reviewed and is approved for permitting – Contractor shall pay all fees. Permit Application #PRRN201801243, 209 Water Street, Unit 100, Johnson City, TN 37601.

SPECIFICATIONS:

ADD 2-2 Refer to Specification Section 10 56 13 – Metal Storage Shelving, and to 3.02, B. Due to the slight slope of the existing concrete floor, floor shims are not required for the shelving units; however the units are required to be mechanically attached to the floor.

ADD 2-3 Refer to Specification Section 12 30 00 – Plastic Laminate Casework, and to 2.07 – Countertops. Gauge of top and front/sides stainless steel covering shall be 18 gauge in lieu of 16 gauge.

DRAWINGS:

ADD 2-4 Refer to Drawing A2 and to Distribution Counter elevations. The three vertical 4" x 4" x 3/8" steel posts shall be revised to 4" x 8" x 3/8" to allow additional space for coiling shutter tracks. Maintain 7'-8" horizontal clearance between posts as currently indicated.

END OF ADDENDUM NO. TWO

  
(Signature)

Debra Dillon, Director, CPPO, CPPB  
(Printed name and title)